


# Sys\*Stim<sup>®</sup> 206 Specifications

## General Specifications:

Input:	120 Volts AC, 60 Hz
Weight:	5.6 lbs.
Dimensions:	4.3 in (H) x 6 in (D) x 13.4 in (L)
Maximum Treatment Time:	29 minutes

## Output Specifications:

Channels:	One
Waveforms:	Narrow, Wide and AC waveforms, zero net DC DC continuous
Voltage:	102 VDC
Max Current:	30 mA, DC continuous 100 mA peak, Narrow Pulse, Wide Pulse, AC
Phase Duration:	
Narrow Pulse	100 $\mu$ s followed by 400 $\mu$ s at $\frac{1}{4}$ amplitude
Wide Pulse	300 $\mu$ s followed by 1200 $\mu$ s at $\frac{1}{4}$ amplitude
AC	300 $\mu$ s each phase
Continuous DC	No pulse—always on unless stopped with pencil electrode or removal of electrode.
Frequency:	Pulse Mode: 1-83 Hz Surge Mode: 35 or 83 Hz
Surge Cycle:	6 s On / 18 Off, 3 s up and down ramps

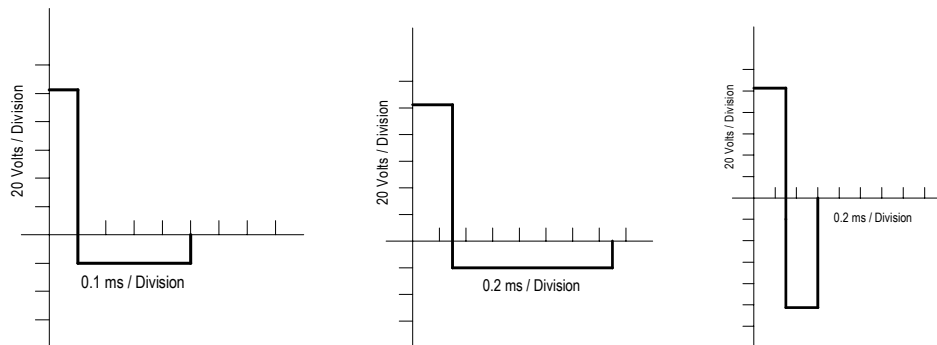

Stimulation Waveform Illustrations